


GENERAL NOTES

- 1. All dimensions are in millimetres
- 2. Dimensions to be read and not scaled off the drawing
- 3. Any discrepancy to be reported to the architect immediately.
- 4. All rc works to be as per the s.e's drawings and details.
- 5. All walls under 200mm thickness to have hoop iron at alternate courses.
- 4. All drainage pipes under slab to be encased in 150mm thick concrete sorround.
- 5. Water meter to be 300mm high above ground
- 6. 'pv' denotes permanent ventilation and is to be provided where shown.
- 7. 'se' denotes structural engineer.
 8. All sanitary work to entire satisfaction of MOH
- and Local authority.Dpc to be three-ply bituminous felt and approved by the architect.10.All doors and window to schedule and

- 11. All timber to be treated with approved quality anti-termite.
- 12. Provide 300mm pc open concrete channel under RW downpipes to civil engineer's
- approval

 13. All electrical work to be carried out by a licenced electrician to the local authority

- 14. This drawing to be read in conjuction with engineer's drawings, structural engineer's drawings,mechanical engineer's drawings,electrical

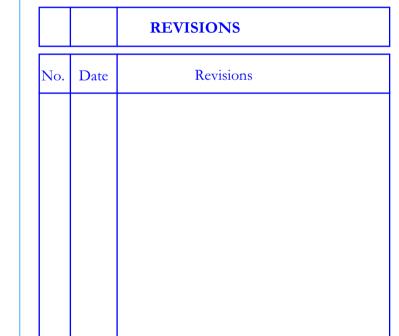

PROJECT TITLE

PROPOSED 46 NO.WAREHOUSES AND ITS AUXILIARY FACILITIES ON PLOT LR NO 11522-LZ 8,9, 10,11,61,65,46,47,48 EASTERN BY-PASS.

INFINITY INDUSTRIAL PARK LTD P.O BOX 38988-00623 NAIROBI, KENYA

DRAWING TITLE

SITE PLAN BLOW-UP. **AUXILIARY UNITS.**

C.A.S

NAIROBI.

S.I.K

1:100

11/10/2021

S3D0120PJ

Architects SKETCH3D LTD

P.O BOX 105965-00101

sketch3dltd@gmail.com info@sketch3d.co.ke

www.sketch3d.co.ke

SKETCH 3D